

THE EFFECTS OF THE REINFORCEMENT OF ALUMINA AND RICE HUSK
PARTICLES ON THE HYBRID RECYCLED ALUMINIUM AA7075 CHIPS
COMPOSITE ON PHYSICAL, MECHANICAL AND MORPHOLOGICAL
PROPERTIES

NOR ASMALINDA BINTI KAMARUDDIN

A thesis submitted in
fulfilment of the requirement for the award of the
Degree of Master of Mechanical Engineering

Faculty of Mechanical and Manufacturing Engineering
Universiti Tun Hussein Onn Malaysia

OCTOBER, 2022

In the Name of Allah, the Most Beneficent and the Most Merciful

This thesis is dedicated to:

My lovely parents;
Husband, Norhisham Samsudin
Father, Kamaruddin Zakaria and Mother, Noriza Mat Tahir
Father in law, Basri Abbas and Mother in law, Normah Abu Bakar

All my family members:
For their infinite love, patience and support.

Appreciate with love,
Thank you.



ACKNOWLEDGEMENT

Praise be to Allah S.W.T, The Almighty, for giving me the strength and chance to conduct and complete my master's study entitled "The effects of the reinforcement of alumina and rice husk particles on the hybrid recycled aluminium AA7075 chips composite on physical, mechanical and morphological properties".

My sincere appreciation goes to my supervisor, Dr Nurul Fitriah Nasir, for her assistance, guidance, advice, encouragement, invaluable knowledge, and comprehensive support, as well as to my co-supervisor, Dr Noradila Abdul Latif, who was assigned for cooperation during the completion of the master's research and provided valuable information, suggestions, and guidance in the compilation and preparation of the master's report.

My gratitude to my cherished parents, who have always supported, inspired and encouraged me. They have made numerous sacrifices to ensure my success, and I believe in them. In addition, my family deserves special thanks for their invaluable encouragement, support, and patience during my master's degree studies.

I am indebted to my colleagues for their continuous assistance in completing this project. I want to express my profound appreciation to the examiner, whose insightful comments and suggestions helped shape the final report. In addition, I am grateful to the technicians and other FKMP lecturers who have assisted me directly and indirectly and instructed me on how to operate the laboratory's machinery and equipment.

Thank you.

ABSTRACT

Currently, agricultural waste derivatives have been incorporated with synthetic particles into a new generation of hybrid aluminium matrix composites (AMC) due to their excellent properties such as low density, accessibility, ability to reduce environmental pollution, and low production cost. This research investigates the effects of particle size of alumina (Al_2O_3) and composition of rice husk silica (RHA) as reinforcements of hybrid recycled aluminium chip composites using the cold compaction process. The AA7075 chip was reinforced with rice husk and alumina powder at range 0.5 -10.5 wt.%. Rice husk and alumina particles were 63 μm and 1.0 μm to 35.0 μm , respectively. Physically, AMC density increased with Al_2O_3 particle size. The highest density, porosity, and water absorption were found at 35.0 μm , with 2.5654 g cm^{-3} , 7.49%, and 3.18%, respectively; the lowest were found at 1.0 μm , with 2.3485 g cm^{-3} , 0.62%, and 0.24%. The density decreased by 3.0 wt.%, rose to 8.0 wt.%, then dropped. Density inversely affects porosity and water absorption. Mechanically, the maximum hardness and compression strength are 5.0 μm and 1.0 μm of Al_2O_3 , respectively. Hardness and compression strength decreased with RHA content. At 0.5 wt.% RHA, hardness and compression strength were 111.99 HV and 174.62 MPa. At 10.5% RHA, hardness and compression strength are 53.70 HV and 65.58 MPa. As particle size increases, the distance between reinforcements increases, resulting in coarser grains. More RHA reduces pore formation and makes pores smaller and rounder. When RHA and Al_2O_3 are added, hybrid aluminium composites work better in aerospace, cars, marines, and electronics.

ABSTRAK

Pada masa ini, derivatif sisa pertanian telah digabungkan dengan zarah sintetik ke dalam komposit aluminium matriks hibrid (AMC) generasi baharu kerana sifatnya yang sangat baik seperti ketumpatan rendah, kebolehcapaian, keupayaan untuk mengurangkan pencemaran alam sekitar dan kos pengeluaran yang rendah. Penyelidikan ini menyiasat kesan saiz zarah alumina (Al_2O_3) dan komposisi silika sekam padi (RHA) sebagai pengukuhan komposit cip aluminium kitar semula hibrid menggunakan proses pemadatan sejuk. Cip AA7075 diperkukuh dengan sekam padi dan serbuk alumina pada julat 0.5 -10.5 wt.%. Sekam padi dan zarah alumina ialah 63 μm dan 1.0 hingga 35.0 μm , masing-masing. Secara fizikal, ketumpatan AMC meningkat dengan saiz zarah Al_2O_3 . Ketumpatan, keliangan, dan penyerapan air tertinggi didapati pada 35.0 μm , dengan 2.5654 g cm^{-3} , 7.49%, dan 3.18%, masing-masing; yang terendah didapati pada 1.0 μm , dengan 2.3485 g cm^{-3} , 0.62%, dan 0.24%. Ketumpatan menurun sebanyak 3.0 wt.%, meningkat kepada 8.0 wt.%, kemudian menurun. Ketumpatan secara songsang mempengaruhi keliangan dan penyerapan air. Secara mekanikal, kekerasan maksimum dan kekuatan mampatan ialah 5.0 μm dan 1.0 μm Al_2O_3 , masing-masing. Kekerasan dan kekuatan mampatan berkurangan dengan kandungan RHA. Pada 0.5 wt.% RHA, kekerasan dan kekuatan mampatan ialah 111.99 HV dan 174.62 MPa. Pada 10.5% RHA, kekerasan dan kekuatan mampatan ialah 53.70 HV dan 65.58 MPa. Apabila saiz zarah bertambah, jarak antara tetulang bertambah, menghasilkan butiran yang lebih kasar. Lebih banyak RHA mengurangkan pembentukan liang dan menjadikan liang lebih kecil dan lebih bulat. Apabila RHA dan Al_2O_3 ditambah, komposit aluminium hibrid berfungsi lebih baik dalam aeroangkasa, kereta, marin dan elektronik.

TABLE OF CONTENTS

DECLARATION	ii
DEDICATION	iii
ACKNOWLEDGEMENT	iv
ABSTRACT	v
ABSTRAK	vi
TABLE OF CONTENTS	vii
LIST OF TABLES	x
LIST OF FIGURES	xi
LIST OF SYMBOLS AND ABBREVIATION	xiv
LIST OF PUBLICATIONS	xvi
 CHAPTER 1 INTRODUCTION	
1.1 Research Background	1
1.2 Problem Statement	3
1.3 Objectives of the Study	4
1.4 Research Scopes	4
1.5 Significant of Study	5
 CHAPTER 2 LITERATURE REVIEW	
2.1 Introduction	6
2.2 Aluminium Alloy	6
2.2.1 AA7075 Aluminium	8

2.2.2	Physical, Mechanical and Morphological Properties	8
2.2.3	Fabrication Process	9
2.2.4	Applications	12
2.3	Hybrid AA7075 Aluminium Composite	15
2.3.1	Reinforcement Materials	16
2.3.1.1	Rice Husk Ash as Reinforcement	19
2.3.1.2	Alumina as Reinforcement	22
2.3.2	Effect on the Material Properties	23
2.3.3	Manufacturing Process	26
2.4	Cold Compaction Method of Hybrid Aluminium Matrix Composite	27
2.4.1	Preparation	29
2.4.2	Processing	29
2.4.2.1	Ball Milling Process	29
2.4.2.2	Compaction Process	30
2.4.2.3	Sintering Process	32
2.4.3	Effects on the Material Properties	34
2.4.3.1	Physical Properties	34
2.4.3.2	Mechanical Properties	36
2.4.3.2.1	Hardness	36
2.4.3.2.2	Compression Strength	38
2.4.3.3	Morphological Properties	39
2.5	Summary	41

CHAPTER 3 METHODOLOGY

3.1	Introduction	43
3.2	Phase 1: Raw Material Preparation	45
3.2.1	Recycled Aluminium 7075 Chip	45
3.2.2	Rice Husk Ash	46
3.2.3	Alumina	47
3.3	Phase 2: Fabrication Process of Hybrid AMC	48
3.3.1	Mixing Process	48
3.3.2	Cold Compaction Process	49

3.3.3	Sintering Process	51
3.4	Phase 3: Testing	52
3.4.1	Physical Testing	52
3.4.2	Grinding and Polishing Sample	53
3.4.3	Mechanical Testing	54
3.4.3.1	Hardness Test	54
3.4.3.2	Compression Test	55
3.4.4	Phase 3: Morphological Testing	55
3.4.4.1	Optical Microscope Analysis	56
3.4.4.2	Scanning Electron Microscope with Energy- Dispersive X-ray Analysis	56

CHAPTER 4 RESULT AND DISCUSSION

4.1	Introduction	58
4.2	Physical Properties of Hybrid AMC	58
4.3	Mechanical Properties of Hybrid AMC	66
4.3.1	Microhardness	66
4.3.2	Compression Strength	68
4.4	Morphological Analysis of Hybrid AMC	72
4.5	Summary of Chapter	80

CHAPTER 5 CONCLUSIONS AND RECOMMENDATION

5.1	Conclusion	83
5.2	Recommendation	84

REFERENCES	86
-------------------	-----------

VITAE	94
--------------	-----------

LIST OF TABLES

2.1	Properties of aluminium series alloy	7
2.2	Chemical composition of AA7075	8
2.3	Summary of physical and mechanical properties of 7075 aluminium	9
2.4	Comparison of the primary and secondary aluminium production processes	11
2.5	AMC in various applications	14
2.6	Physical properties and chemical composition of RHA	19
2.7	Properties of micro-sized aluminium oxide	23
3.1	Chemical composition of aluminium AA7075 chips	45
3.2	Chemical Composition of Rice Husk Ash (wt.%)	46
3.3	Chemical Composition of Al_2O_3 powder (wt.%)	47
3.4	Percentage Composition of Al Chip Reinforced with RHA/ Al_2O_3	49
4.1	The density, porosity and water absorption of hybrid AMC	59
4.2	Result of Microhardness Vickers (HV)	66
4.3	The result of compression strength (MPa) and strain (%) of hybrid AMC	69

LIST OF FIGURES

2.1	Morphology image 7075 aluminium	9
2.2	Process of aluminium	10
2.3	Flow chart of the conventional recycling and direct conversion of aluminium	12
2.4	Aluminium in commercial Airlines	14
2.5	Classification of reinforcement	17
2.6	Diagram of the rice cycle and uses of rice husk, biochar and rice husk ash	20
2.7	Schematic of applications of derived rice husk	21
2.8	Ultimate tensile strength of composites vs composition of RHA	24
2.9	Hardness of composites vs composition of RHA	25
2.10	% Elongation of composites vs composition of RHA	25
2.11	Fabrication routes for AMCs	27
2.12	Process of Powder Metallurgy	28
2.13	Schematic diagram of powder particles are trapped between balls during high-energy ball milling	30
2.14	Schematic diagram of compaction process	30
2.15	Compaction process	31
2.16	Sintering cycle	33
2.17	Plot for theoretical, experimental density and porosity as a function of wt.% of RHA	35
2.18	Hardness plot for Al/SiC/RHA composites with wt.of RHA	37

2.19	The hardness of Al-MMC with varying content of SiC and mixing methods	38
2.20	Impacts of particle size on compressive strength of Al-MMC	39
2.21	SEM of RHA	40
2.22	SEM of Al7075 powder	40
2.23	SEM images of alumina powders	40
2.24	SEM micrograph of hybrid AMC	41
3.1	Flow chart of the research work	44
3.2	Recycled Aluminium 7075 chip	45
3.3	Furnace for burning process	46
3.4	Sieving machine	46
3.5	Rice husk silica process	47
3.6	Rice husk silica	47
3.7	Alumina Particles	48
3.8	Ball milling machine	48
3.9	Compaction Samples	50
3.10	Uniaxial Hydraulic Press Machine	50
3.11	Sintering Profile	51
3.12	Sintered aluminium matrix composite sample	51
3.13	Density Apparatus	52
3.14	Grinding and Polishing Machine	54
3.15	Microhardness machine	55
3.16	Universal Testing Machine	55
3.17	Optical Microscopic Machine	56
3.18	SEM-EDX Machine	57
4.1	Effect particle sizes of Al ₂ O ₃ reinforced AA7075 towards density	60
4.2	Effect of RHA reinforced AA7075 on density	61
4.3	Effect of particle sizes of Al ₂ O ₃ reinforced AA7075 towards porosity	62
4.4	Effect of RHA reinforced AA7075 towards porosity	63
4.5	Effect particle sizes of Al ₂ O ₃ reinforced AA7075	64

	towards water absorption	
4.6	Effect of RHA reinforced AA7075 towards water absorption	65
4.7	Effects of RHA and particle sizes of Al_2O_3 reinforced AA7075 towards microhardness	67
4.8	Graph of compressive strength of $Al7075/RHA/Al_2O_3$	70
4.9	Optical Microscope Image of AMC sample at 1.0 μm	73
4.10	Optical Microscope Image of AMC sample at 5.0 μm	74
4.11	Optical Microscope Images of AMC sample at 35.0 μm	75
4.12	SEM-EDX Images of AMC sample at 1.0 μm	76
4.13	SEM-EDX Images of AMC sample at 5.0 μm	77
4.14	SEM-EDX Images of AMC sample at 35.0 μm	78
4.15	The correlation between the hardness and density of hybrid AMC with the composition of RHA	81
4.16	The correlation between the hardness and porosity of hybrid AMC with the composition of RHA	82



LIST OF SYMBOLS AND ABBREVIATIONS

AMC	-	Aluminium Matrix composite
Al ₂ O ₃	-	Alumina / Aluminium Oxide
Al ₄ C ₃	-	Aluminium Carbide
Al	-	Aluminium
AlN	-	Aluminium Nitride
ASTM	-	American Society for Testing and Material
B ₄ C	-	Boron Carbide
BN	-	Boron Nitride
BHN	-	Brinell Hardness Number
CMC	-	Ceramic Matrix Composites
Cr	-	Chromium
Cu	-	Copper
CeO ₂	-	Ceric Oxide
EDX/EDS	-	X-ray Energy Dispersive Spectroscopy
Fe	-	Iron
FEC	-	Forming Extrusion Cutting
GSA	-	Groundnut Shell Ash
HBN	-	Hard Boron Nitride
HV	-	Vickers Pyramid Number for hardness testing
HAMC	-	Hybrid Aluminium Matrix Composite
MMC	-	Metal Matrix Composites
Mn	-	Manganese
MoS ₂	-	Molybdenum Sulfide
Mg	-	Magnesium
OM	-	Optical Microscope
PMC	-	Polymer Matrix composite
PM	-	Powder Metallurgy

RHA	-	Rice Husk Ash
RH	-	Rice husk
SiC	-	Silicon Carbide
SiO ₂	-	Silicon Dioxide
Si ₃ N ₄	-	Silicon Nitride
SEM	-	Scanning Electron Microscope
Ti	-	Titanium
TiC	-	Titanium Carbide
TiB ₂	-	Titanium Diboride
TlN	-	Thallium Nitride
UTM	-	Universal Testing Machine
UTS	-	Ultimate Tensile Strength
WC	-	Tungsten Carbide
Zn	-	Zinc
ZrC	-	Zirconium Carbide



LIST OF PUBLICATIONS

Journals:

- i. Kamaruddin, N.A., Nasir, N.F., N.A., Roslan, M. F., & Joharudin, N. F. M. Physical properties of rice husk silica / alumina reinforced aluminium alloy matrix composite produced by cold compaction process. *Materials Science and Engineering*. (Acceptance on 27th June 2022)
- ii. Kamaruddin, N.A., Nasir, N.F., N.A., Roslan, M. F., & Joharudin, N. F. M. Mechanical properties of rice husk silica / alumina reinforced aluminium alloy matrix composite produced by cold compaction process. *Journal AIP Proceeding*. (Acceptance on 27th July 2022)
- iii. Roslan, M. F., Latif, N. A., Joharudin, N. F. M., Nasir, N. F., Kamaruddin, N. A., & Mustapa, M. S. (2021). Investigation of Rice Husk Silica and Alumina Reinforcements on Hardness and Physical Properties for Aluminium Matrix Composite. *Journal AIP Proceeding*. (Acceptance)

CHAPTER 1

INTRODUCTION

1.1 Research Background

A composite is a mixture of two or more materials with different mechanical and physical properties, one as a matrix and the other as a reinforcement. One of unique classes of composites is aluminium matrix composite (AMCs). There are two categories of aluminium: primary aluminium and secondary aluminium. Primary aluminium is mined from ore, while secondary aluminium results from scrap metal.

Based on the International Aluminium Institute data, global primary aluminium output increased by 176,000 tonnes, or 3.10% per month in July 2022. China produced the highest amount of aluminium, 3.468 million tonnes, followed by Asia with 382,000 tonnes, and Oceania 153,000 tonnes (Ganguly, 2022). Aluminium hybrid composites reinforced with ceramics particles are in high demand, with applications used in nuclear power plants, automotive, aerospace, thermal management, and sports. This is due their low weight, excellent corrosion resistance, higher thermal conductivity, and wear resistance.

Selecting the proper fabrication method, process parameters, and reinforcing type aid in determining the required characteristics of manufactured AMCs. According to Hariharasakthiansudhan, P., and Jose, S. (2017) showed that the use of dual particle size reinforcement enhanced composites' tribological and mechanical properties. The result of ultimate tensile strength is 72.3 MPa, yield strength of 148 MPa, compression strength of 253 MPa and the hardness of the composites was dominated by single reinforcement. The strengthening mechanism of the dual reinforcement in the composites is the dislocation density due to proper bonding between the presence of Si_3N_4 nanoparticles and hard Al_2O_3 particles in the matrix. AMCs frequently use

ceramic particles such as Al_2O_3 , SiO_2 , SiC , and TiO_2 as synthetic reinforcement. The properties of this reinforcement is, high wear resistance, high-temperature properties, low pressure sintered to full density in the air, thermal stability, high chemical resistance, and high hardness. According to Zamani et al. (2020), the hardness, tensile strength, and compressive strength of an Al_2O_3 nanoparticle reinforced aluminium matrix composite produced by powder metallurgy increase with increasing Al_2O_3 volume.

In addition, natural resources and industrial waste, such as rice husk ash, red mud, fly ash, coconut shell ash, and sugar bagasse ash, have been utilized in AMC as reinforcement. Rice husk contains 85 to 87% silica compared to other biomass fuels, representing a high level of porosity and having lower densities than other technical ceramics (such as boron carbide, alumina), low weight, and a large exterior surface area, thereby reducing the cost of aluminium products. RHA's primary component is amorphous silica, which is utilised in the production of silica gels, the synthesis of activated carbon and silica, silicon chips, the production of lightweight construction materials and insulation, catalyst, and other applications (Pode, 2016; Tiwari & Pradhan, 2017). In an investigation of the Al7075/ RHA/ Mica composite by squeeze casting, Sathiesh Kumar (2021) found that as RHA content increased, hardness increased, impact energy decreased, and tensile strength increased up to 10%, then decreased to 15%.

This study examines the physical, mechanical and morphological properties of the hybrid AMCs made with agro-waste (RHA) products as a supplement to the synthetic reinforcement (Al_2O_3) in the cold-compacted process AMC. The advantages of this method compared to the melting method are low processing temperature to prevent undesirable phases between matrix and reinforcement, low cost, the ability to shape the powder directly into its final parts, the ability to create complex-shaped parts, and the reduction of machining time (Abbas Gohar et al., 2018; Kumarasamy et al., 2017; Liu et al., 2016; RaviKumar et al., 2018b). Previous research has demonstrated that the cold compaction method improves AMC's mechanical and physical properties. According to Zamani et al. (2021), cold compaction provides uniform distribution and strong bonding between the matrix and reinforcement, with no holes. Consequently, it generates AMCs with excellent mechanical properties. In addition, N.F. Mohd Joharuddin et al. (2019) discovered that RHA amorphous silica filled the voids and covered the pores in the AA7075 aluminium chips to produce a smooth surface on the

sample. Sherafat Z. et al. (2009) investigated the fabrication of Al7075/Al, a two-phase material, by recycling Al7075 alloy chips via powder metallurgy. Ab Kadir M.I. et al. (2017) analyzed the microstructural and mechanical properties of an aluminium chip strengthened with Al powder using the cold compact technique. Researchers also proved that Al 7075 reinforced with alumina produces better mechanical properties than Al 6061 reinforced with SiC (Krishnan et al., 2019).

1.2 Problem Statement

The material involved in this research is aluminium AA7075 as a matrix, with alumina and rice husk ash as reinforcement. The properties of aluminium are ductile, high strength-to-weight ratio, thermal conductivity and attractive natural finish. However, aluminium shows very low strain hardening in plastic deformation and performs poorly in fretting, wear, impact, and energy absorption. Aluminium possesses a low melting point (660°C) and density (2.70g/cm^3) (Ashkenazi, 2019). Thus, the combination of aluminium's superior ductility and ceramic reinforcement will produce an advanced material for applications requiring wear resistance, high strength, and hardness. Reinforcement may consist of fibres or particles. This is because such reinforcement will control the microstructures, size and distribution of constituents, tribology, and mechanical properties over percentage by weight (Zaiemyekheh et al., 2019).

Synthetic reinforcement such as Al_2O_3 , TiO_2 , SiC, SiO_2 and graphite are commonly used in AMCs. Alumina can prevent the formation of undesirable phases and reactions with the matrix due to the fact that aluminium is highly reactive with atmospheric oxygen. This is because alumina in a pure aluminium matrix is regarded as the optimal dispersion with no chemical reaction. In addition, oxide coatings such as Al_2O_3 protect the fabrication of composites, thereby preventing the formation of the Al_4C_3 phase (aluminium carbide needle phase), which is detrimental to the corrosion resistance and mechanical properties of AMCs (Bodunrin et al., 2015). Unfortunately, the high manufacturing costs associated with synthetic reinforcement limit the use of AMCs in automotive and other applications. Utilizing organic resources and industrial waste is one way to reduce production expenses. Rice husk ash is an agricultural byproduct that also serves as a mineral additive. The primary component of RHA is

amorphous silica and contains high silica compared to the other waste, which is utilized in producing silica gels, synthesizing activated carbon and silica, silicon chips, lightweight construction materials and insulation (Pode, 2016). In addition, rice husk is considered a waste product and is used as a combustion material in rice mills and factories' boilers (Kannan, 2018).

Previous researchers have reported a lack of research on combining two reinforcements in AMC, such as alumina and RHA. Therefore, the effects of reinforcing hybrid AA7075 aluminium chips with alumina and rice husk particles were studied to enhance the physical, mechanical, and morphological properties of AMC. This is anticipated to contribute to the long-term viability of primary aluminium resources for recycling.

1.3 Objectives of the Study

The purpose of this study is to:

- (i) To investigate the effects of 2 wt.% of alumina in various particle sizes as reinforcement on the physical, mechanical and morphological properties of hybrid recycled aluminium chips.
- (ii) To investigate the effects of rice husk silica in different weight percentages on the physical, mechanical and morphological properties of hybrid recycled aluminium chips.

1.4 Research Scopes

The following is the scope of this research:

1. Recycled AA7075 aluminium chips as a matrix, and it was reinforced with alumina particles and rice husk particles.
2. Preparation of the specimen hybrid aluminium composite reinforced with different sizes of 2 wt. % alumina (1.0 μ m, 5.0 μ m and 35.0 μ m) and different weights percentage of rice husk ash (0.5%, 3.0%, 5.5%, 8.0% and 10.5%).
3. The fabrication process of aluminium chip reinforced with alumina particles and rice husk ash (silica) in various percentage and particle sizes was

performed by using ball milling process. The fabrication of AA7075/ RHA /Al₂O₃ samples were performed under cold compaction process.

4. The effect of rice husk ash and alumina on the aluminium physical properties was determined through density following ASTM B328, while porosity and water absorption by the ASTM B962-17 standard.
5. The hardness and compression properties of AMCs were evaluated using the Vickers Hardness and Compression Test followed by the ASTM E384 and ASTM E9 standards, respectively.
6. The morphology properties were analysed under Optical Microscope and Scanning Electron Microscope.

1.5 Significant of Study

The selection of fabrication process and raw materials is crucial to achieving a successful outcome when fabricating RHA/Al₂O₃-reinforced hybrid recycled aluminium AA7075 matrix composites. There are a few hypotheses for this research:

- i. The cold compaction method is superior to the melting process for the following reasons: low processing temperature to prevent undesired phases between matrix and reinforcement, the ability to shape the powder directly into its finished parts, the ability to create complex-shaped components, and a reduction in machining time.
- ii. The different particle sizes of alumina as a hardening phase in aluminium chip recycling can improve AMC's properties due to the alumina's oxides content.
- iii. Reinforcement Rice husk ash particles can increase a sample's hardness and compressive strength due to the high silica content of rice husk ash.
- iv. Increasing the reinforcement provides an average sample density with reduced porosity and water absorption.

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

A growing number of researchers are examining the cycling process of aluminium chips due to their commercial value, excellent properties, and potential applications in manufacturing technologies for aircraft, automobiles, and marine vessels. As a result, manufacturer was able to achieve greater benefits from this material, including enhanced performance, cost savings, and environmental advantages.

2.2 Aluminium Alloy

Aluminum alloys are made from scrap aluminium. Compared to industrial primary aluminium, scrap aluminium alloy has a lower melting temperature, a shorter melting time, a lower metal burning loss, and lower energy consumption. During the alloy composition adjustment phase, less metal is added to the scrap aluminium alloy while the alloy composition distribution becomes more uniform and optimises the microstructure. Additionally, the energy consumption per tonne of recycled aluminium production is only about 3–5% of that of primary aluminium production, reducing production costs and decreasing carbon dioxide and sulphur oxide emissions during manufacturing. It contributes to the conservation of resources and protecting the environment (Zhou et al., 2021).

Both cast and wrought aluminium alloys are types of aluminium alloy. One can be fabricated from solid metals, while the other is constructed from molten alloys poured into a mould. Based on their strengthening working conditions, heat-treatable and non-heat-treatable aluminium alloys can be categorised. The Aluminium

Association Inc. uses a four-digit system to classify wrought alloys into nine different series, each with a unique combination of alloying additions. First-digit alloys (Xxxx) are primary components, while second-digit alloys (xXxx) are modifications. An alloy can be determined by the last two numerals (xxXX) of the serial number. A wide range of applications is possible because of the wide range of material qualities (Georgantzia et al., 2021). Table 2.1 describes details about the properties of aluminium series alloys.

Al 7xxx alloys, also known as aluminium-zinc alloys, are anticipated to contain a maximum amount of zinc between 5.1 and 6.1 % (Imran & Khan, 2019). In addition, Al 7075 has superior quality and tensile strength, making it useful for aerospace and automobile components. Furthermore, Al 7075 has superior mechanical properties to Al 6061. In addition, Al 7075 is superior to Al 2024 and Al 6061 series due to its superior heat treatability and response to ageing (RaviKumar et al., 2018b).

Table 2.1: Properties of aluminium series alloy (Zhang, Jinliang et al., 2019).

Series	Types	Elements	Performance
1xxx	non-heat-treatable	Pure Al (>99.00%)	Low strength, good corrosion resistance and conductivity, easy processing
2xxx	heat treatable	Al-Cu/AL-Cu-Mg	Hard aluminium alloy, high-strength, good heat resistance, poor corrosion resistance
3xxx	non-heat-treatable	Al-Mn	Antirust aluminium alloy, low strength, cold-working-hardening, good plasticity and weldability
4xxx	non-heat-treatable	Al-Si	High silicon, low melting point, good weldability, good heat and wear resistance
5xxx	non-heat-treatable	Al-Mg	High magnesium, good corrosion resistance and weldability
6xxx	heat treatable	Al-Mg-Si	Medium strength, good formability, weldability and machinability
7xxx	heat treatable	Al-Zn-Mg	Very high strength, cannot be welded, poor corrosion resistance
8xxx	-	Other elements	-
9xxx	-	Spare alloys	-
9xxx	-	Spare alloys	-

2.2.1 AA7075 Aluminium

Al 7075 is the most widely utilised grade for fabricating single and hybrid reinforced composites. The main alloying element in this grade is Zinc. The composition of Al 7075, as shown in Table 2.2 which are Cr (0.18 – 0.28 %), Ti (0.2 %), Mn (0.3 %), Si (0.4 %), Fe (0.5 %), Cu (1.2 – 1.6 %), Mg (2.1-2.5%), and Zn (5.6 – 6.1 %). It has superior workability, corrosion resistance, thermal conductivity, strength, low density, improved wear and erosion resistance, and stiffness and is inexpensive. In addition, it improves hardness, dislocation density, reinforcement dispersion, and interphase bonding (Sharma & Mishra, 2019; Wu et al., 2014).

Table 2.2: Chemical composition of Al 7075 (Imran & Khan, 2019).

Composition	Zn	Si	Fe	Ti	Cu	Mn	Mg	Cr	other	Bal
Percentage	5.1-6.1	0.4	0.5	0.2	1.2-2.0	0.3	2.1-2.9	0.18-0.28	0.65	Al

2.2.2 Physical, Mechanical and Morphological Properties

Aluminum 7075 has the physical properties of being a lightweight metal with a density of 2.81g/cm³. This type is also advantageous in high-pressure situations. The copper content of 7075 aluminium increases its susceptibility to corrosion. However, this sacrifice is required to create a material that is both durable and workable.

The modulus of elasticity and shear modulus measure a material's deformation resistance. 7075 aluminum's elasticity modulus is 71.7 GPa (10,400 ksi) and its shear modulus is 26.9 GPa (3900 ksi). This alloy is strong and resists deformation well, making it ideal for tough-yet-light applications. Yield strength is the maximum stress (or force) that won't permanently deform a material. 7075 aluminium alloy has a tensile yield strength of 503 MPa (83,000 psi), meaning it takes 503 MPa of stress to deform it. This value shows the benefit of alloying aluminium and why 7075 is ideal for frame tubing. Despite its low density, 7075 aluminium has an ultimate tensile strength of 572 MPa (83000 psi). Aerospace companies are concerned about fatigue failure in 7075 aluminium. Even with a force below its yield point, a material can fail. If the material is cyclically stressed, microfractures can weaken it and cause it to break. Fatigue strength measures a material's ability to withstand cyclical loading and is useful when

a part made from this material is subject to repetitive loading cycles (such as in aircraft or motor vehicles). 7075 aluminium has a 159 MPa fatigue strength (23,000 psi). This number is based on 500,000,000 cycles of constant, periodic loading below the yield point. This shows how a strong alloy can be broken over time by smaller forces. (Cavallo, 2022) . The summary of 7075 aluminium shown in Table 2.3 and the microstructure of pure Al 7075 shown in Figure 2.1.

Table 2.3: Summary of physical and mechanical properties of 7075 aluminium alloy.

Properties	Metric	English
Density	2.81 g/cm ³	0.102 lb/in ³
Ultimate Tensile Strength	572 MPa	83000 psi
Tensile Yield Strength	503 MPa	73000 psi
Shear Strength	331 MPa	48000 psi
Fatigue Strength	159 MPa	23000 psi
Modulus of Elasticity	71.7 GPa	10400 ksi
Shear Modulus	26.9 GPa	3900 ksi

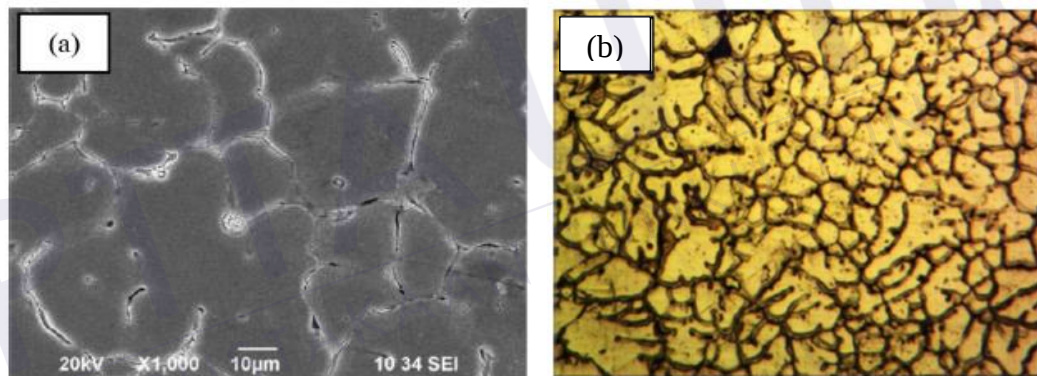


Figure 2.1 : Morphology image 7075 aluminium (a) SEM (b) Optical microscope (Robinson Smart et al., 2021).

2.2.3 Fabrication Process

Globally, metal machining processes generate vast quantities of metal scrap. In addition, the global demand for aluminium has increased, as the consumption of aluminium products has doubled and is projected to increase two to threefold by 2050 (Haraldsson & Johansson, 2018; Krishnan et al., 2019). As a result, there are two types of aluminium: primary and secondary. Primary aluminium is derived from the bauxite alumina, while secondary aluminium is derived from aluminium scrap (Mahinroosta

REFERENCES

- Aamir, M., Giasin, K., Tolouei-Rad, M., & Vafadar, A. (2020). A review: drilling performance and hole quality of aluminium alloys for aerospace applications. *Journal of Materials Research and Technology*, 9(6), 12484-12500.
- Abbas Gohar, G., Manzoor, T., & Shah, A. N. (2018). Investigation of thermal and mechanical properties of Cu-Al alloys with silver addition prepared by powder metallurgy. *Journal of Alloys and Compounds*, 735, 802-812.
- Akbar, H. I., Surojo, E., & Ariawan, D. (2020). Investigation of Industrial and Agro Wastes for Aluminum Matrix Composite Reinforcement. *Procedia Structural Integrity*, 27, 30-37.
- Arunkumar, S., Subramani Sundaram, M., Suketh kanna, K. M., & Vigneshwara, S. (2020). A review on aluminium matrix composite with various reinforcement particles and their behaviour. *Materials Today: Proceedings*, 33, 484-490.
- Ashkenazi, D. (2019). How aluminum changed the world: A metallurgical revolution through technological and cultural perspectives. *Technological Forecasting and Social Change*, 143, 101-113.
- Awotunde, M. A., Adegbenjo, A. O., Obadele, B. A., Okoro, M., Shongwe, B. M., & Olubambi, P. A. (2019). Influence of sintering methods on the mechanical properties of aluminium nanocomposites reinforced with carbonaceous compounds: A review. *Journal of Materials Research and Technology*, 8(2), 2432-2449.
- Bodunrin, M. O., Alaneme, K. K., & Chown, L. H. (2015). Aluminium matrix hybrid composites: a review of reinforcement philosophies; mechanical, corrosion and tribological characteristics. *Journal of Materials Research and Technology*, 4(4), 434-445.
- Calvo, W. A., Ortega, P., Velasco, M. J., Muñoz, V., Pena, P., & Martinez, A. G. T. (2018). Characterization of alumina-magnesia-carbon refractory bricks containing aluminium and silicon. *Ceramics International*, 44(8), 8842-8855.

- Cavallo, C. (2022). All About 7075 Aluminium (Properties, Strength and Uses). Retrieved 1/10/2022, from Thomasnet.com <https://www.thomasnet.com/articles/metals-metal-products/all-about-7075-aluminum-properties-strength-and-uses/>
- Chak, V., Chattopadhyay, H., & Dora, T. L. (2020). A review on fabrication methods, reinforcements and mechanical properties of aluminum matrix composites. *Journal of Manufacturing Processes*, 56, 1059-1074.
- Chi, Y., Gu, G., Yu, H., & Chen, C. (2018). Laser surface alloying on aluminum and its alloys: A review. *Optics and Lasers in Engineering*, 100, 23-37.
- Duflou, J. R., Tekkaya, A. E., Haase, M., Welo, T., Vanmeensel, K., Kellens, K., et al. (2015). Environmental assessment of solid state recycling routes for aluminium alloys: Can solid state processes significantly reduce the environmental impact of aluminium recycling? *CIRP Annals*, 64(1), 37-40.
- Dwivedi, S. P., & Kumar, A. (2021). Development of graphite and alumina reinforced aluminium based composite material. *Materials Today: Proceedings*, 34, 825-828.
- Fernandes, I. J., Calheiro, D., Kieling, A. G., Moraes, C. A. M., Rocha, T. L. A. C., Brehm, F. A., et al. (2016). Characterization of rice husk ash produced using different biomass combustion techniques for energy. *Fuel*, 165, 351-359.
- Ganguly, M. (2022). World primary aluminium production in July'22 gains 2.06% on year in spite of global energy crunch. Retrieved 24 Sept 2022 <https://www.alcircle.com/news/world-primary-aluminium-production-in-july22-gains-2-06-on-year-in-spite-of-global-energy-crunch-83353>
- Garg, P., Jamwal, A., Kumar, D., Sadasivuni, K. K., Hussain, C. M., & Gupta, P. (2019). Advance research progresses in aluminium matrix composites: manufacturing & applications. *Journal of Materials Research and Technology*, 8(5), 4924-4939.
- Georgantzia, E., Gkantou, M., & Kamaris, G. S. (2021). Aluminium alloys as structural material: A review of research. *Engineering Structures*, 227, 111372.
- Gronostajski, J., Marciniak, H., & Matuszak, A. (2000). New methods of aluminium and aluminium-alloy chips recycling. *Journal of Materials Processing Technology*, 106(1), 34-39.
- Haraldsson, J., & Johansson, M. T. (2018). Review of measures for improved energy efficiency in production-related processes in the aluminium industry – From

- electrolysis to recycling. *Renewable and Sustainable Energy Reviews*, 93, 525-548.
- Idrisi, A. H., & Mourad, A.-H. I. (2019). Conventional stir casting versus ultrasonic assisted stir casting process: Mechanical and physical characteristics of AMCs. *Journal of Alloys and Compounds*, 805, 502-508.
- Illgen, A., Weidner, A., & Biermann, H. (2018). Influence of particle and short-fibre reinforcement on the very high cycle fatigue behaviour of aluminium matrix composites. *International Journal of Fatigue*, 113, 299-310.
- Imran, M., & Khan, A. R. A. (2019). Characterization of Al-7075 metal matrix composites: a review. *Journal of Materials Research and Technology*, 8(3), 3347-3356.
- Irshad, H. M., Hakeem, A. S., Ahmed, B. A., Ali, S., Ali, S., Ali, S., et al. (2018). Effect of Ni content and Al₂O₃ particle size on the thermal and mechanical properties of Al₂O₃/Ni composites prepared by spark plasma sintering. *International Journal of Refractory Metals and Hard Materials*, 76, 25-32.
- Jiang, B., Zhenglong, L., Xi, C., Peng, L., Nannan, L., & Yanbin, C. (2019). Microstructure and mechanical properties of TiB₂-reinforced 7075 aluminum matrix composites fabricated by laser melting deposition. *Ceramics International*, 45(5), 5680-5692.
- Joel, J., & Anthony Xavier, M. (2018). Aluminium Alloy Composites and its Machinability studies; A Review. *Materials Today: Proceedings*, 5(5, Part 2), 13556-13562.
- Kadir, M. I. A., Mustapa, M. S., Latif, N. A., & Mahdi, A. S. (2017). Microstructural Analysis and Mechanical Properties of Direct Recycling Aluminium Chips AA6061/Al Powder Fabricated by Uniaxial Cold Compaction Technique. *Procedia Engineering*, 184, 687-694.
- Kanayo Alaneme, K., & Apata Olubambi, P. (2013). Corrosion and wear behaviour of rice husk ash—Alumina reinforced Al–Mg–Si alloy matrix hybrid composites. *Journal of Materials Research and Technology*, 2(2), 188-194.
- Kandavalli, S. R., Rao, G. B., Bannaravuri, P. K., Rajam, M. M. K., Kandavalli, S. R., & Ruban, S. R. (2021). Surface strengthening of aluminium alloys/composites by laser applications: A comprehensive review. *Materials Today: Proceedings*, 47, 6919-6925.

- Kang, S.-H., Hong, S.-G., & Moon, J. (2019). The use of rice husk ash as reactive filler in ultra-high performance concrete. *Cement and Concrete Research*, 115, 389-400.
- Kanhere, N., Rafiz, K., Sharma, G., Sun, Z., Jin, Y., & Lin, Y. S. (2019). Electrode-coated alumina separators for lithium-ion batteries - effect of particle size and distribution of alumina powders. *Powder Technology*, 353, 230-237.
- Kannan, V. (2018). Strength and durability performance of self compacting concrete containing self-combusted rice husk ash and metakaolin. *Construction and Building Materials*, 160, 169-179.
- Khazaal, S. M., Nimer, N. S. M., Szabolcs, S., Al Ansari, I. S., & Abdulsamad, H. J. (2022). Study of manufacturing and material properties of the hybrid composites with metal matrix as tool materials. *Results in Engineering*, 16, 100647.
- Krishnan, P. K., Christy, J. V., Arunachalam, R., Mourad, A.-H. I., Muraliraja, R., Al-Maharbi, M., et al. (2019). Production of aluminum alloy-based metal matrix composites using scrap aluminum alloy and waste materials: Influence on microstructure and mechanical properties. *Journal of Alloys and Compounds*, 784, 1047-1061.
- Kumar, J., Singh, D., & Kalsi, N. S. (2019). Tribological, Physical And Microstructural Characterization Of Silicon Carbide Reinforced Aluminium Matrix Composites: A Review. *Materials Today: Proceedings*, 18, 3218-3232.
- Kumar, N., Bharti, A., & Saxena, K. K. (2021). A re-investigation: Effect of powder metallurgy parameters on the physical and mechanical properties of aluminium matrix composites. *Materials Today: Proceedings*.
- Kumar, R. A., Kumar, R. G. A., Ahamed, K. A., Alstyn, B. D., & Vignesh, V. (2019). Review of Friction Stir Processing of Aluminium Alloys. *Materials Today: Proceedings*, 16, 1048-1054.
- Kumarasamy, S. P., Vijayananth, K., Thankachan, T., & Muthukutti, G. P. (2017). Investigations on mechanical and machinability behavior of aluminum/flyash cenosphere/Gr hybrid composites processed through compocasting. *Journal of Applied Research and Technology*, 15(5), 430-441.
- Liu, J., Khan, U., Coleman, J., Fernandez, B., Rodriguez, P., Naher, S., et al. (2016). Graphene oxide and graphene nanosheet reinforced aluminium matrix

- composites: Powder synthesis and prepared composite characteristics. *Materials & Design*, 94, 87-94.
- Mahinroosta, M., & Allahverdi, A. (2018). Hazardous aluminum dross characterization and recycling strategies: A critical review. *Journal of Environmental Management*, 223, 452-468.
- Mampuru, K. M., Ajenifuja, E., Popoola, A. P. I., & Popoola, O. (2019). Effect of silicon carbide addition on the microstructure, hardness and densification properties of spark plasma sintered Ni-Zn-Al alloy. *Journal of King Saud University - Science*, 31(4), 1122-1126.
- Manohar, G., Pandey, K. M., & Maity, S. R. (2021). Characterization of Boron Carbide (B_4C) particle reinforced aluminium metal matrix composites fabricated by powder metallurgy techniques – A review. *Materials Today: Proceedings*.
- Menghani, J., Chaudhary, Y., & Pandya, S. (2022). Effect of reinforcement on microstructure and mechanical properties of aluminium hybrid composites. *Materials Today: Proceedings*, 62, 5653-5659.
- Milhorato, F. R., Figueiredo, R. B., Langdon, T. G., & Mazzer, E. M. (2020). Development of an Al 7050-10 vol.% alumina nanocomposite through cold consolidation of particles by high-pressure torsion. *Journal of Materials Research and Technology*, 9(6), 12626-12633.
- Mohseni, E., Kazemi, M. J., Koushkbaghi, M., Zehtab, B., & Behforouz, B. (2019). Evaluation of mechanical and durability properties of fiber-reinforced lightweight geopolymer composites based on rice husk ash and nano-alumina. *Construction and Building Materials*, 209, 532-540.
- Mustapa, M. S., Mahdi, A. S., Lajis, M. A., & Rashid, M. W. A. (2016). Physical properties of recycling milled aluminium chip (AA6061) for various sintering temperature. *International Journal of Mechanical and Industrial Technology*, 3(2), 33-40.
- N.F. Mohd Joharudin, N. Abdul Latif, M.S. Mustapa, M.N. Mansor, W.A. Siswanto, J. Murugesan, et al. (2019). Effect of amorphous silica by rice husk ash on physical properties and microstructures of recycled aluminium chip AA7075. *Materialwiss Werkstofftech*, 50, 1-6.
- Nateq, B., Haddad-Sabzevar, M., Sajjadi, S. A., Saba, F., Deirmina, F., & Pellizzari, M. (2021). Architectural design of MWCNT reinforced AlSi10Mg matrix

- composites with comprehensive mechanical properties. *Composites Communications*, 25, 100716.
- Otani, L. B., Matsuo, M. M., Freitas, B. J. M., Zepon, G., Kiminami, C. S., Botta, W. J., et al. (2019). Tailoring the microstructure of recycled 319 aluminum alloy aiming at high ductility. *Journal of Materials Research and Technology*, 8(4), 3539-3549.
- Patil, V., Janawade, S., Kulkarni, S. N., & Biradar, A. (2021). Studies on mechanical behavior and morphology of alumina fibers reinforced with aluminium-4.5% copper alloy metal matrix composites. *Materials Today: Proceedings*, 46, 99-106.
- Pode, R. (2016). Potential applications of rice husk ash waste from rice husk biomass power plant. *Renewable and Sustainable Energy Reviews*, 53, 1468-1485.
- Prasad, D. S., Shoba, C., & Ramanaiah, N. (2014). Investigations on mechanical properties of aluminum hybrid composites. *Journal of Materials Research and Technology*, 3(1), 79-85.
- Rahimian, M., Parvin, N., & Ehsani, N. (2010). Investigation of particle size and amount of alumina on microstructure and mechanical properties of Al matrix composite made by powder metallurgy. *Materials Science and Engineering: A*, 527(4), 1031-1038.
- Rahimian, M., Parvin, N., & Ehsani, N. (2011). The effect of production parameters on microstructure and wear resistance of powder metallurgy Al–Al₂O₃ composite. *Materials & Design*, 32(2), 1031-1038.
- Ravikumar, M., Reddappa, H. N., & Suresh, R. (2018a). Aluminium Composites Fabrication Technique and Effect of Improvement in Their Mechanical Properties – A Review. *Materials Today: Proceedings*, 5(11, Part 3), 23796-23805.
- RaviKumar, M., Reddappa, H. N., & Suresh, R. (2018b). Mechanical and Wear behavior of Al7075/Al₂O₃/SiC Hybrid Composite. *Materials Today: Proceedings*, 5(2, Part 1), 5573-5579.
- Rawat, M. K., Kukreja, N., & Gupta, S. K. (2020). Effect of reinforcing micro sized aluminium oxide particles on mechanical properties of polymer based composite. *Materials Today: Proceedings*, 26, 1306-1309.

- Robinson Smart, D. S., Pradeep Kumar, J., & Periasamy, C. (2021). Microstructural, mechanical and wear characteristics of AA7075/TaC/Si₃N₄/Ti based hybrid metal matrix composite material. *Materials Today: Proceedings*, 43, 784-794.
- Roslan, M. F., Latif, N. A., Joharudin, N. F. M., Nasir, N. F., Kamaruddin, N. A., & Mustapa, M. S. (2021). Investigation of Rice Husk Silica and Alumina Reinforcements on Hardness and Physical Properties for Aluminium Matrix Composite.
- Sahu, P. S., & Banchhor, R. (2016). *Fabrication methods used to prepare Al metal matrix composites- A review*.
- Salman, K. D., Al-Maliki, W. A. K., Alobaid, F., & Epple, B. (2022). Microstructural Analysis and Mechanical Properties of a Hybrid Al/Fe₂O₃/Ag Nano-Composite. 12(9), 4730.
- Sankhla, A. M., Patel, K. M., Makhesana, M. A., Giasin, K., Pimenov, D. Y., Wojciechowski, S., et al. (2022). Effect of mixing method and particle size on hardness and compressive strength of aluminium based metal matrix composite prepared through powder metallurgy route. *Journal of Materials Research and Technology*, 18, 282-292.
- Saravanakumar, R., Ramachandran, K., Laly, L. G., Ananthapadmanabhan, P. V., & Yugeswaran, S. (2018). Plasma assisted synthesis of γ -alumina from waste aluminium dross. *Waste Management*, 77, 565-575.
- Shaikh, M. B. N., Arif, S., Aziz, T., Waseem, A., Shaikh, M. A. N., & Ali, M. (2019). Microstructural, mechanical and tribological behaviour of powder metallurgy processed SiC and RHA reinforced Al-based composites. *Surfaces and Interfaces*, 15, 166-179.
- Sharma, A., & Mishra, P. M. (2019). Effects of various reinforcements on mechanical behavior of AA7075 hybrid composites. *Materials Today: Proceedings*, 18, 5258-5263.
- Singh, H., Raina, A., & Irfan Ul Haq, M. (2018). Effect of TiB₂ on Mechanical and Tribological Properties of Aluminium Alloys – A Review. *Materials Today: Proceedings*, 5(9, Part 3), 17982-17988.
- Singh, R., & Kumar, A. (2022). A literature survey on effect of various types of reinforcement particles on the mechanical and tribological properties of aluminium alloy matrix hybrid nano composite. *Materials Today: Proceedings*.

- Soltani, N., Bahrami, A., Pech-Canul, M. I., & González, L. A. (2015). Review on the physicochemical treatments of rice husk for production of advanced materials. *Chemical Engineering Journal*, 264, 899-935.
- Sridhar, A., & Lakshmi, K. P. (2021). Evaluation of mechanical and wear properties of aluminum 7075 alloy hybrid nanocomposites with the additions of SiC/Graphite. *Materials Today: Proceedings*, 44, 2653-2657.
- Srivyas, P. D., & Charoo, M. S. (2018). Role of Reinforcements on the Mechanical and Tribological Behavior of Aluminum Metal Matrix Composites – A Review. *Materials Today: Proceedings*, 5(9, Part 3), 20041-20053.
- Tiwari, S., & Pradhan, M. K. (2017). Effect of rice husk ash on properties of aluminium alloys: A review. *Materials Today: Proceedings*, 4(2, Part A), 486-495.
- Umanath, K., Palanikumar, K., & Selvamani, S. T. (2013). Analysis of dry sliding wear behaviour of Al6061/SiC/Al₂O₃ hybrid metal matrix composites. *Composites Part B: Engineering*, 53, 159-168.
- Wang, Y., Wang, W., Wang, D., Liu, Y., & Liu, J. (2021). Study on the influence of sample size and test conditions on the capillary water absorption coefficient of porous building materials. *Journal of Building Engineering*, 43, 103120.
- Wu, C., Fang, P., Luo, G., Chen, F., Shen, Q., Zhang, L., et al. (2014). Effect of plasma activated sintering parameters on microstructure and mechanical properties of Al-7075/B₄C composites. *Journal of Alloys and Compounds*, 615, 276-282.
- Xie, X., Yin, S., Raoelison, R.-n., Chen, C., Verdy, C., Li, W., et al. (2021). Al matrix composites fabricated by solid-state cold spray deposition: A critical review. *Journal of Materials Science & Technology*, 86, 20-55.
- Yadav, A. K., Pandey, K. M., & Dey, A. (2018). Aluminium Metal Matrix Composite with Rice Husk as Reinforcement: A Review. *Materials Today: Proceedings*, 5(9, Part 3), 20130-20137.
- Zaiemyekheh, Z., Liaghat, G. H., Ahmadi, H., Khan, M. K., & Razmkhah, O. (2019). Effect of strain rate on deformation behavior of aluminum matrix composites with Al₂O₃ nanoparticles. *Materials Science and Engineering: A*, 753, 276-284.
- Zamani, N. A., Iqbal, A. K. M. A., & Nuruzzaman, D. M. (2020). Tribo-mechanical characterisation of self-lubricating aluminium based hybrid metal matrix composite fabricated via powder metallurgy. *Materialia*, 14, 100936.

- Zamani, N. A. B. N., Asif Iqbal, A. K. M., & Muhammad Nuruzzaman, D. (2020). Fabrication and characterization of Al_2O_3 nanoparticle reinforced aluminium matrix composite via powder metallurgy. *Materials Today: Proceedings*, 29, 190-195.
- Zhang, J., Pang, X., Chen, H., Shi, G., & Deng, W. (2019). Process and forming performance of ploughing extrusion cutting for recycling of metal chips. *Journal of Materials Processing Technology*, 274, 116283.
- Zhang, J., Song, B., Wei, Q., Bourell, D., & Shi, Y. (2019). A review of selective laser melting of aluminum alloys: Processing, microstructure, property and developing trends. *Journal of Materials Science & Technology*, 35(2), 270-284.
- Zhou, B., Liu, B., Zhang, S., Lin, R., Jiang, Y., & Lan, X. (2021). Microstructure evolution of recycled 7075 aluminum alloy and its mechanical and corrosion properties. *Journal of Alloys and Compounds*, 879, 160407.



VITAE

The author was born on June 11, 1989, in Besut, Terengganu. She went to Sekolah Menengah Kebangsaan Agama Nurul Ittifaq, Kuala Besut, Terengganu for her secondary education. She pursued her tertiary education at Kolej Mara Kulim, and graduated with Matriculation Certification in 2008. After that, she went on to continue her bachelor's degree at the Universiti Malaysia Perlis and by June 2012, she had successfully graduated with her Bachelor's Degree in Material Engineering with Honour. She has working experience around 10 years in Manufacturing Field. In February 2018, she decided to further pursue her studies at UTHM as part time student, determined to complete his Master's degree in Mechanical Engineering under Faculty of Mechanical and Manufacturing Engineering. Her field of research is powder metallurgy, where she focused on the aluminium alloy 7075 of solid state recycling aluminium chip and rice husk and alumina as reinforcing agent. The author had produces 2 technical papers during Master journey. The author also has professional membership with Malaysia engineering Council (BEM).

